

Grade 40: Pump Lifting Chains






Pump lifting chains are mainly used for the lowering and raising of submergible pumps in environments such as boreholes, waterworks, sewerage treatment facilities and many other below ground operations when either for routine maintenance or to carry out vital upkeep they are an extremely popular and practically indispensable piece of lifting equipment.

Fitted with master rings at each end and at 1 metre centres, all items are supplied tested and complete with relevant certification see our shackle section for list of compatible shackles.



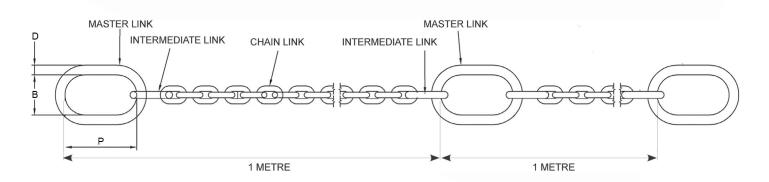

Lifting Capacity	Chain Link (mm)				Intermediate Link (mm)			Master Link (mm)			Weight Per
	D	P	В	Links	D	P	В	D	P	В	mtr (Kg)
500kg	7	22	10	35	9	59	18	13	110	50	1.76
1000kg	10	30	14.5	25	11	72	19	18	135	75	2.90