


M12 safety anchor EyeFix EN-795:2012 type A



Product Information

- Versions M12 bolt, M12 nut, M12 nut with thread for brick and concrete walls
- Suitable for metal- and concrete constructions
- Fixation in threaded hole, bolted or with separate thread
- Threaded hole minimum free length 22mm
- Maximum 2 persons
- EN-795:2012 type A & TS 16415:2013
- Tested 22kN
- Suitable for Rope Access 15kN
- Unique serial number laser engraved

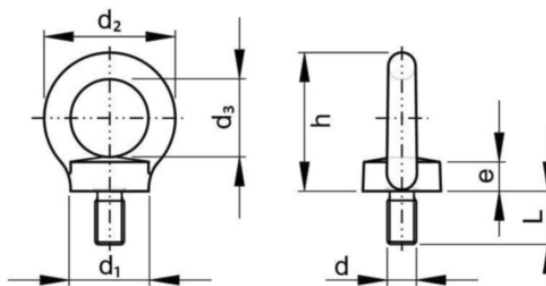

Technical Information

- Threaded hole M12, bolt hole >12mm
- Material AISI304 / RVS A2
- Fixation in threaded hole with chemical glue, glued with bolt, glued with threaded rod end
- Easy in use, very solid, reliable
- Optional coating in various RAL-colors
- Dimensions d1=30mm, d2=54mm, d3=30mm, e=10mm, h=53mm, L=20.5mm, P=1.75mm, d=12mm
- Information and serial number laser engraved
- Weight 0,16 kg

Marking & Information

