

Safety Anchor UnitFix Bended EN-795:2012 type A





Product information

- Suitable for metal roofs
- Safety Anchor Fall Protection
- Maximum two persons
- Certified by Quintin Certifications
- EN-795:2012 type A & TS 16415:2013
- Tested 13 kN




Technical information

- Fixation by 8 pieces Bulb-Tite rivets 5 x 22mm
- Drilling hole 5,2 - 5,2 mm
- Double fall indicator
- Safety Anchor with internal energy absorber
- Stainless steel
- Square size 240 x 220 x 65 mm

Drawings & impressions

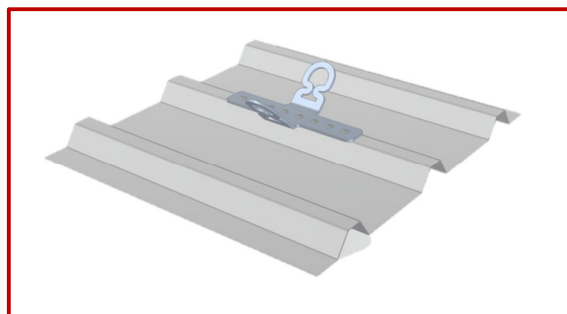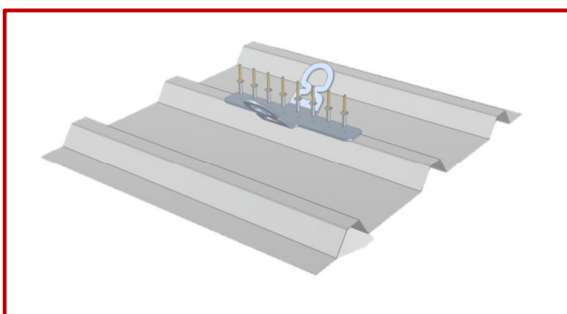

Marking & information



Calculating your fall arrest and safe working height

Calculations using a fall arrest lanyard fixed at foot level

	2m Lanyard	1,5m Lanyard
Lanyard Length	2m	1.5m
Energy Absorber	1.75m	1.75m
Body Height	2m	2m
Safety Distance	1m	1m
Minimum Clearance	6.75m	6.25m

