

RGA22



Sliding Beam Anchor

RGA22



- For horizontal applications
- Lightweight
- For single-user operation
- Simple release buttons allow quick adjustment to fit a wide range of beam flange widths
- Combination of premium steel and aluminium alloy make it strong and durable
- Complete with a fully articulated D-ring for complete freedom of movement during use

EN 795:2012, Type B

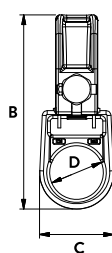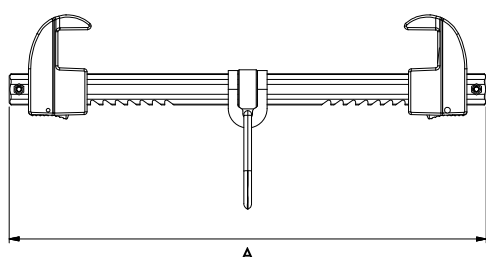

Material:	Steel alloy
Beam width range:	110 - 358mm
Weight:	1.9kg
Overall length (A):	490mm
Overall height (B):	200mm
Overall width (C):	76mm
D-ring diameter (D):	55mm
Traceability:	Batch number
Maximum jaw thickness:	30mm