

## Safety Anchor type Snapfix




### Product information

- Suitable for metal and concrete structures
- Fall Protection
- Maximum two persons
- Fall indicator intergrated
- Certified by DEKRA Exam GmbH
- EN-795:2012 type A & TS 16415:2013




### Technical information

- Concrete minimal drilling depth 75 mm
- Drilling hole mechanical anchor 16 mm
- Fixation by one (1) M10/M12 bolt or anchor
- Easy and reliable Safety Anchor
- Basepart with central hole 60 x 55mm; total 140mm
- Eyelet part 80 x 55 mm; opening 30 mm

### Drawings & impressions

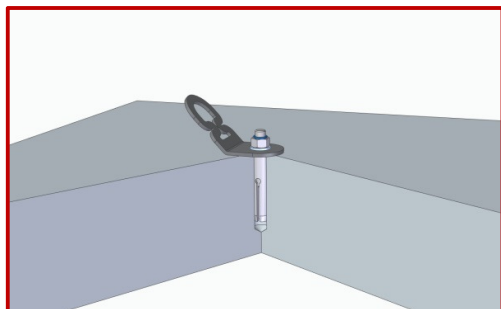

### Marking & information



### Calculating your fall arrest and safe working height

Calculations using a fall arrest lanyard fixed at foot level

|                   | 2m Lanyard | 1.5m Lanyard |
|-------------------|------------|--------------|
| Lanyard Length    | 2m         | 1.5m         |
| Energy Absorber   | 1.75m      | 1.75m        |
| Body Height       | 2m         | 2m           |
| Safety Distance   | 1m         | 1m           |
| Minimum Clearance | 6.75m      | 6.25m        |

