


This equipment should only be used by competent persons, who have been trained in the use of this specific kit.


These user instructions are to be read in conjunction with the individual user instructions for each specific item of equipment, which are included in the kit.

Only connect to suitable attachment points on the rescuers and casualties harnesses.

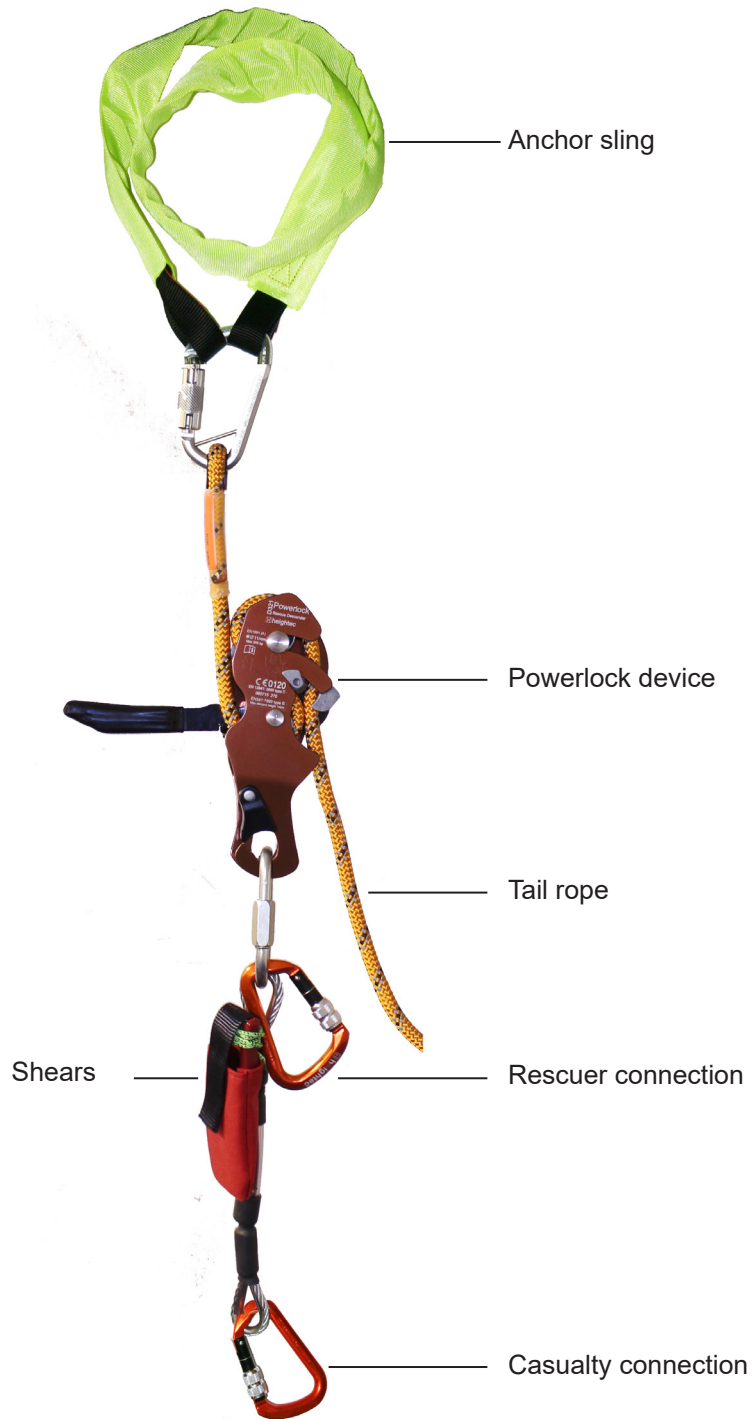

Inspect before and after every use. In addition a detailed inspection should be carried out by a competent person at intervals no greater than twelve months.

Lowering a casualty

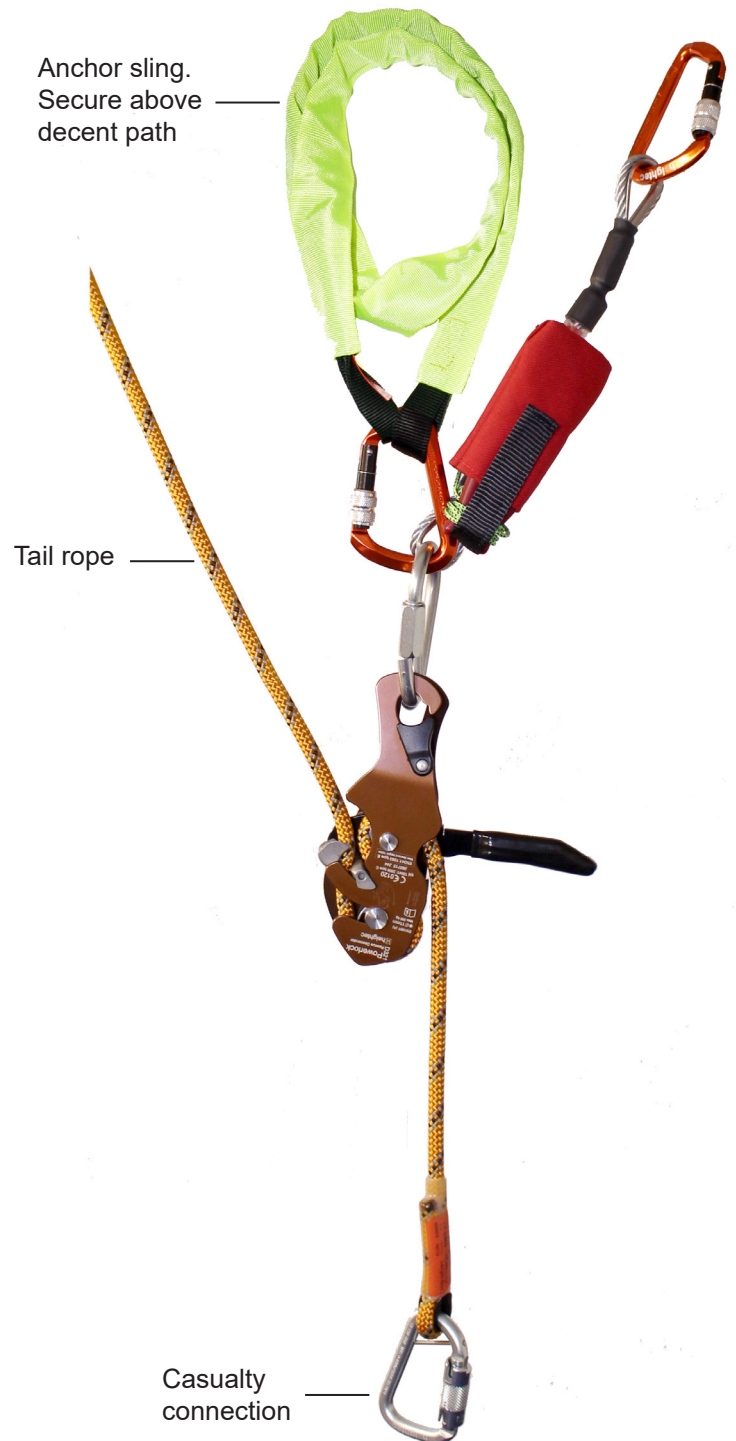

Kit contents

CODE	DESCRIPTION
A030M	Wire sling, 30cm
B30	Kari Transport bag
CKA2	Altus karabiner
CKS3	Astra karabiner
CSP10	Screwlink pear 10mm
D321	Powerlock rescue descender
MSK2	Rescue shears with cord and pouch
RS110G	Tectra 11mm rope - 50m (WK33)
RS110G	Tectra 11mm rope - 100m (WK34)
S25N120P	Sling, nylon



Assembly

1. Feed rope into bag.
2. Thread Powerlock on to rope following diagram marked on device or pictures in file. Device should be approx 30cm from end of terminated end.
3. Put CSP10 screwlink on device.
4. Attach the SAS030M knife strop to the CSP10. Put MSK2 in pouch and attach cord.
5. Hand tighten screwlink in closed position.
6. Clip CKA2 into screwlink. Clip other CKA2 to end of knife strop.
7. Captivate CKS3C on to the terminated end of rope.
8. Attach S25N120P sling to CKS3C ensuring stitched end is on krab. Note: Ensure the stitched end of the S25N120P is connected to the CKS3C.
9. Secondary person checks.
10. Add all user instructions and prompt sheet x 2 security tags.
11. Attach security tag to outer bag.

Disclaimer: It is the users responsibility to assemble the kit correctly referring to individual product user instructions.