



PLATFORM TRUCKS

MODEL NO'S: **CST991.V3, CST992.V3, CST993.V2**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual

1. SAFETY

- ✓ Always load evenly with the centre of gravity of the load as near the centre of the truck as possible.
- ✓ Obtain additional support for large or wide loads to prevent tipping.
- ✗ **DO NOT** overload the truck - see Specifications.
- ✗ **DO NOT** leave unattended, especially when loaded, unless the wheels are chocked or the truck is otherwise secured.
- ✗ **DO NOT** use truck on uneven ground and do not run over curbs or steps - use a ramp.
- ✗ **DO NOT** allow others to ride on the truck.
- ✗ **DO NOT** use the truck if any part is significantly damaged - pay particular attention to the wheels.

2. INTRODUCTION

Rigid platform trucks feature rubberised deck and bumper strip on CST991 and CST992 and heavy-duty wooden deck and tubular steel bumper on CST993. Handles on CST991 and CST992 fold flat for ease of storage. CST993 Handle detaches completely. Suitable for a variety of warehouse, office and domestic applications.

3. SPECIFICATION

Model	CST991.V3	CST992.V3	CST993.V2
Capacity	150kg	300kg	250kg
Height	815mm	870mm	960mm
Platform W X D	465 x 725mm	605 x 910mm	495 x 950mm
Platform height	140mm	185mm	225mm

4. ASSEMBLY



Numbers/letters in brackets refer to those on the relevant parts diagrams below.

4.1. CST991 & CST992

- 4.1.1. Remove the bolts and washers (C) from the underside corners of the deck and use them to attach the wheels (A, B).
Note: Two wheels are swivel castors (B), these should be fitted at the handle end of the deck.
- 4.1.2. To fold down the platform truck handle frame (CST 991.V3, CST 992.V3) push down the release bar (D) and fold the handle over the base, release bar when in place.

4.2. CST993

- 4.2.1. Remove the bolts (C) and washers (D) from the underside corners of the deck and use them to attach the wheels (A, B).
Note: Two wheels are swivel castors (B), these should be fitted at the handle end of the deck.
- 4.2.2. Remove the two bolts (E) from the ends of the handle frame (F).
- 4.2.3. Locate the ends of the handle frame in the sockets in the deck frame and retain with the screws.

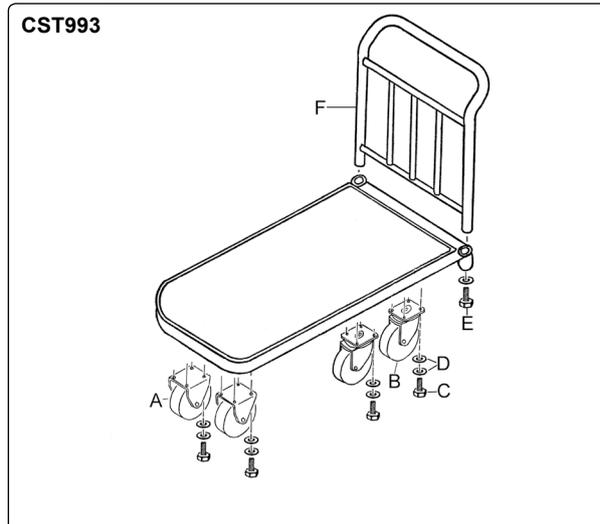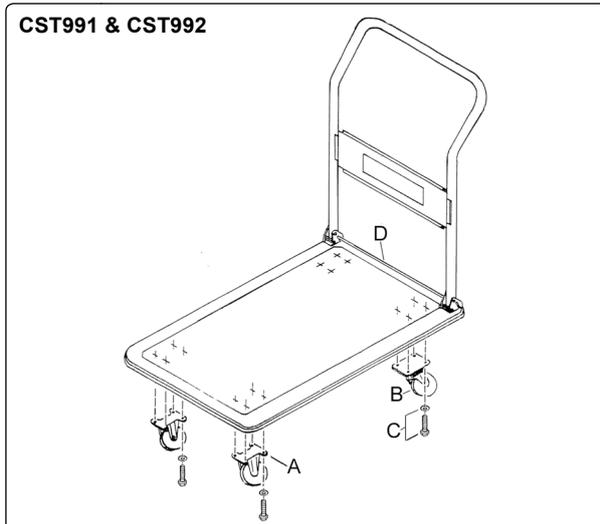

Parts support is available for this product. To obtain parts, please log on to www.sealey.co.uk, email sales@sealey.co.uk or telephone 01284 757500



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on technical@sealey.co.uk or 01284 757505.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk