

Working pressure 700 bar

HHB-7000 is one-way pump for single-acting applications.
HHB-7000S is two-way pump for double-acting applications.


Supplied with high pressure hose 1.8 meters and R2 3/8 quick coupler with dust cap.

Characteristics:

- HHB-7000 and HHB-7000S feature extra large reservoirs and high first-stage flow rate. These pumps are ideally suited for powering high-capacity cylinders.
- Two-speed hydraulic system for fast and easy operation.
- Large release valve handle for controlling load descent.



HHB-7000

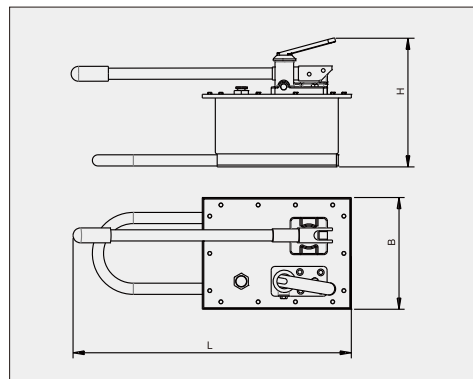

Model	Pump type	Working pressure (bar)		Oil displacement per stroke (cm ³)		Reservoir (cm ³)		Dimensions (mm)			Packing size (cm)	Weight (Kg)
		Low pressure stage	High pressure stage	Low pressure stage	High pressure stage	Oil capacity	Usable oil capacity	L	B	H		
HHB-7000	one-way	20	700	126.2	4.75	7500	7000	740	310	330	83×38 ×35	26
HHB-7000S	two-way	20	700	126.2	4.75	7500	7000	740	310	330	83×38 ×35	28