

Working pressure 700 bar

Square and large oil tank

HHB-700E is one-way pump for single-acting hydraulic applications

HHB-700S is two-way pump for double-acting hydraulic applications

## Characteristics:


- Robust and durable construction.
- Handle lock (HHB-700E) and quick grip handle. (HHB-700S) for easy transport.
- Two-speed hydraulic system for fast and easy operation.
- Reduced handle effort and ergonomic grip for less operator fatigue.
- Internal pressure relief valve for overload protection.
- Large oil capacities to power a wide range of cylinders or tools.
- Supplied with high pressure hose 1.8 meters and R2 3/8 quick coupler with dust cap.



HHB-700E



HHB-700S

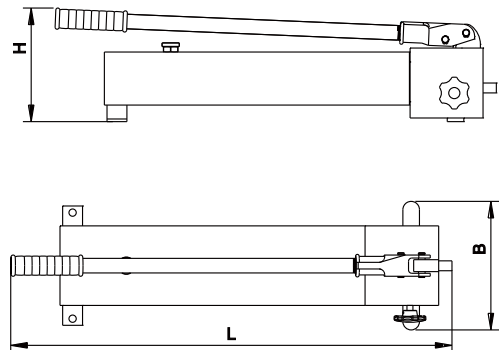

Model	Pump type	Working pressure (bar)		Oil displacement per stroke (cm³)		Reservoir (cm³)		Dimensions (mm)			Packing size (cm)	Weight (Kg)
		Low pressure stage	High pressure stage	Low pressure stage	High pressure stage	Oil capacity	Usable oil capacity	L	B	H		
HHB-700E	one-way	20	700	13	2.3	2500	2000	710	150	210	73×19×19	13
HHB-700S	two-way	20	700	13	2.3	3500	3000	710	150	275	79×24×27	20