

EQ001IS | 125 KG ELECTRIC CHAIN HOIST

The **EQ001** is a 125 kg compact and lightweight electric chain hoist from KITO. This model is just part of Red Rooster Lifting's full range of KITO equipment available.



Its compactness and its reduced dimensions are some of the special features of KITO's EQ electric chain hoist. The EQ offers in comparison to KITO's ER2 series, a considerable reduction in the net weight by 23%. With the lifting capacities ranging from 250 kg to 1,000 kg the EQ can be used to perform a wide range of tasks. Furthermore a wide variety of suspensions and lifting heights are available.

The EQ includes an inverter that provides an industry-first "light load high-speed" function that automatically increases hoist speed to 130% when the load is less than 30% of WLL. As a result, users can expect the production cycle to improve up to 115% of standard. This unique operating characteristic makes the product ideal for assembly line, work station, and repetitive operation applications.

STANDARD FEATURES

- Frequency inverter (standard speed ratio 6:1)
- 380 – 440 V / 50 Hz / 3 P
- Electronic overload limiter
- Extremely robust Aluminium die-cast body
- Electromagnetic pull-rotor motor brake
- Heavy-duty fan-cooled motor
- Electronic thermal motor protection prevents overheating
- Hanging suspension
- Upper – lower limit switch
- Counter hour meter
- Ergonomic push button control
- Control voltage 24 V DC
- Abrasion-resistant nickel-plated load chain (800 N/mm²), in accordance with standard DIN EN 818-7
- Plastic chain container

KITO



SAFETYLIFTINGGEAR.COM

Contact Us


Tel: 0117 9381 600
Fax: 0117 9381 602
email: sales@safetyliftinggear.com

Unit R1D Rockingham Gate
Poplar Way West
Cabot Park
Bristol
BS11 0YW

EQ001IS | 125 KG ELECTRIC CHAIN HOIST

DIMENSIONS

All measurements are in mm
Information subject to change without notice

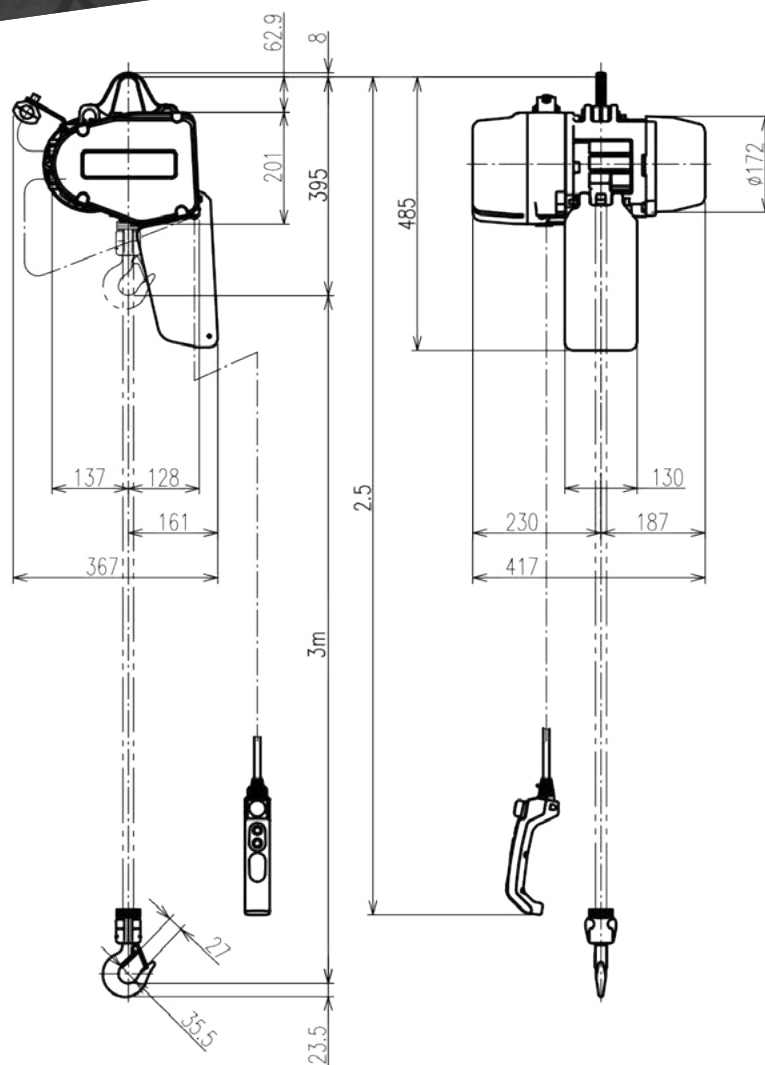

MODEL	WLL KG	TRAVERSING MOTOR		LIFTING SPEED M/MIN		
		OUTPUT KW	RATING % ED	HIGH 0-30%	HIGH 30-100%	LOW
EQ001IS	125	0.5	40/20	22.1	17.0	2.8
MODEL	CLASSIFICATION ISO / FEM		WEIGHT KG	LOAD CHAIN MM		
				DIA	X	FALLS
EQ001IS	3m		30	5.6	x	1

KITO